



ZHEJIANG ZOMAX GARDEN MACHINERY CO.,LTD.

Address: No. 48 Aodihu Road, Taiping Street, Wenling City, Zhejiang Province, China.

Tel: 86 576 8614 6556 / 8614 6558 / 8614 6566

Fax: 86 576 86146567 / 86146568

E-mail: sales@zomaxtool.com





FZOMAX®

Outdoor Power Equipment: Garden & Forestry





About **ZOMAX**

Established in 2005, ZHEJIANG ZOMAX GARDEN MACHINERY CO., LTD, as a subsidiary of ZOMAX Group, is a professional manufacturer of Outdoor Power Garden Machinery, main products including Gasoline Chainsaw, Gasoline Brush Cutter, and 58V Battery Garden Tools, etc. ZOMAX Garden serves as the National High-tech Enterprise and Zhejiang Standard Innovative Enterprise. The products are widely used in fields such as field courtyards, parks, gardens, trees, orchards, tea gardens, and forestry operations.



ZOMAX LOBBY



ZOMAX GEAR WORKSHOP



ZOMAX WAREHOUSE



ZOMAX STAFF CANTEEN



ZOMAX CULTURE CORNER



Perfect Products Manufacture

In the mass production stage, we always adhere to the principle "3 No" to defective products, they are: "No acceptance, No produce, No delivery". By means of the continuous check to make continuous improvement so as to meet users' needs better.









Forceful R&D Team

ZOMAX always take Innovation R&D as the core competitiveness of the enterprise, we have been committed to the research and development of green and environmentally friendly lithium battery products, and low energy cost gas products. Meanwhile, with the unremitting efforts of R&D teams. At present, ZOMAX Garden has won 11 National Invention Patents, over 150 patents for Utility Models and Appearance, and has built the Provincial-level New High-tech Enterprise Research and Development Center.



FZOMAX[®] | www.zomaxtool.com



ZC SERIES ZM4010/ZM4610/ZM5010/ZM5410 Sufficient air flow brings better cooling of the engine.

Paper air-filter offers excellent anti-dust, Suitable for ZM4010, option for ZM4610, ZM5010, ZM5410.



Adjustable oil pump present controllable oil flow. Suitable for ZM4010/4610/5010/ 5410.



Double nylon mesh air filter material, great density provide better anti-dust, easy to clean and maintenance. Suitable for ZM4610/5010/5410.



ZM4010 (€ € ®

Light weight, low-vibration chainsaw, with improved air cooling system to ensure that you can start easily after a short break. Highly suitable for pruning limbs, cutting firewood or taking down a whole small tree.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg











Robust chainsaws are designed to endure the tough conditions and severe environment. This saw delivers more power and extra durability, thanks to the magnesium alloy crankcase, suitable for cutting firewood.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg













ZM5010 CE EUV EPAIII

Superior quality with charming performance, 2-stroke engine and ignition system ensures fast starts and smooth operation. Easy to maintain and service. Long-life air filter system with air routing. Ideal for ground keeping.

Displacement **49.8** cc **Rated Power** 2.0 kW / 2.7 hp **Dry Weight 5.0** kg







ZM5410 ((🕳 🍩

Easy to start and control, ideal for those who cut irregularly. Designed to handle multiple cutting tasks. A good choice for craftsmen, farmers and home users.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg











Model	ZM4010	ZM4610	ZM5010	ZM5410
Displacement	39.6 cc	45.6 cc	49.8 cc	54.0 cc
Rated Power	1.5 kW / 2.0 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Ф41 / 30 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Idle Speed	$3,300 \pm 400 \mathrm{rpm}$	3,300 ± 400 rpm	3,300 ± 400 rpm	$3,300 \pm 400 \mathrm{rpm}$
Fuel Capacity	410 ml	520 ml	520 ml	520 ml
Oil Capacity	240 ml	260 ml	260 ml	260 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm)/14"(34cm)/16" (38cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)





Ergonomic and comfortable starter knob promote easy starting. Suitable for ZM4020/4620/5020/5420.



Toggle switch for better durability. Suit well for ZM4020/4620/5020/5420.



Compartable construction design, smart and light-weight. Suitable for ZM4020.



ZM4020 (€ € ®

Upgrade version of the ZM4010, increased power from its optimized design of air induction system, it is a big help with your list of wood cutting chores around the home.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg





ZM4620 CE EUV EPAIII

Mid-range saws with high torque over a wide rpm range for tough cutting, combine the best characteristics of its predecessor with new, facilitating technology and ergonomics. Easy to guide, great handling. Ideal for cutting firewood and for felling of small to medium trees.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg













ZM5020 C€ € © EuV EPAIII

Built to tackle the toughest jobs. Whether you are pruning limbs, cutting firewood or taking down a whole tree, it is designed to provide a long, trouble-free life. you need a chainsaw that starts easily, runs smoothly, and provides years of dependable performance.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg











ZM5420 (€ € ®

Thanks to vibration reduction technology and group control which provide easier access to all functions. More comfortable and controllable. It is certified to the highest level of service life to ensure maximum value of your investment, good for harvesting wood in medium-density stands.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg

















ZE SERIES ZM4100/ZM4630/ZM5030/ZM5430 Increased engine power makes cutting more efficient.

Replaceable spiked bumper, more controllable for easier cutting. Ideal for ZM4100.

Fuel primer is available, easy to start. Suitable for ZM4100/4630/ 5030/5430.

Dual protection came from the appliance of metal and plastic chain catcher, safety ensured. Suitable for ZM4630/ZM5030/ ZM5430.







ZM4100 (€ € ®

The digital ignition system ensures a smooth acceleration and running, its air filter with paper element avoids clogging with sawdust, highly suitable for cutting fire-wood and for building timber.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg











Recommended for semi-professional usage, special cylinder treatment brings a powerful engine, exacting demands of high performance, productivity and durability. Designed for the toughest environment to the ranch, farm or anywhere you choose.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg















ZM5030 CE EuV EPAIII

Powerful and lightweight, provide high torque even at low RPM. Convenient and agile. Highly suitable for any kind of agricultural use such as lopping, collecting firewood, felling and cutting up medium sized trees.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg















Designed to satisfy a wide range of users, from demanding of gardeners requiring a tool for frequent use, to farmers and professional contractors. Power-to-weight ratio ensure excellent cutting performance for any use, from limbing and pruning to cutting medium-sized trunks.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg













Model	ZM4100	ZM4630	ZM5030	ZM5430
Displacement	39.6 cc	45.6 cc	49.8 cc	54.0 cc
Rated Power	1.5 kW / 2.0 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Φ41 / 30 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Idle Speed	3,300 ± 400 rpm	3,300 ± 400 rpm	3,300 ± 400 rpm	3,300 ± 400 rpm
Fuel Capacity	410 ml	520 ml	520 ml	520 ml
Oil Capacity	240 ml	260 ml	260 ml	260 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm)/14"(34cm)/16" (38cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)





Ergonomic designed lock, easy to open or tighten.



Flexible, safe and reliable switch, easy to operate. Suitable for ZMC4601/ZMC5001 /ZMC5401



Unique designed flywheel blade, prolong life by adequate intake air volume and powerful engine. Suitable for ZMC4601/ZMC5001 /ZMC5401





ZMC4002 (€ € ®

A big improvement has been made for the double cylinder of internal engine, reduce the oil consumption and temperature. It has bilateral oil seal with itself, strengthen the leak proofness of the engine and shrink the compress volume of crankcase. Light plastic crankcase. Anti-freezing material is available, even works at -40°C. With improved muffler air structure, the chainsaw can run in high speed with lower temperature and efficient in fuel consumption, both practical and economical.

Displacement	39.6 cc
Rated Power	1.6 kW / 2.2 hp
Dry Weight	4.3 kg









Efficiency Brake



ZMC4601 (E BUV EPAIII

Apart from the good looking of the overall design, the performance of the engine $\,$ is incredible. Low-profile but hard wearing. It's operation is strictly designed comply with the human experience data. Excellent and comfortable operation experience for the users. The ideal saw for ground keeping.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg













Robust chainsaw for home using, with new eye-catching appearance, a new series for your choice, suitable item for light or medium daily cutting.

Pisplacement	49.8 cc
ated Power	2.0 kW / 2.7 hp
Pry Weight	5.0 kg











ZMC5401 (€ € ®

An updated outlook for 54cc chainsaw, with the revised starter cover, a better cooling system is build to cope with different working conditions. Idea for handle multiple cutting tasks.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg











Model	ZMC4002	ZMC4601	ZMC5001	ZMC5401
Displacement	39.6 cc	45.6 cc	49.8 cc	54.0 cc
Rated Power	1.6 kW / 2.2 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Φ41 / 30 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Idle Speed	3,300 ± 400 rpm	3,300 ± 400 rpm	3,300 ± 400 rpm	3,300 ± 400 rpm
Fuel Capacity	480 ml	520 ml	520 ml	520 ml
Oil Capacity	240 ml	260 ml	260 ml	260 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm)/14"(34cm)/16" (38cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)







The most valuable choice for users.

Easy starter system for option, suitable for ZMC4003/ ZMC4650/ZMC5050/ ZMC5450



Tootless oil/fuel tank cap, easy to open or tighten, Suitable for ZMC4003/ ZMC4650/ ZMC5050/ZMC5450



Complied with GS standard, safe distance from brake level to front hand guard, easy to operate. Suitable for ZMC4003/ZMC4650/ ZMC5050/ZMC5450.



ZMC4003 (€ € ®

The kernel component has upgrade, like cylinder, crankcase bearing, oil seal, muffler, manifold and so on, bring you different feelings when sawing. New appearance make you feel fresh and cool. The engine has improved, power become higher, fuel consumption become lower, and it reduces the temperature.

39.6 cc
1.6 kW / 2.2 hp
4.3 kg











ZMC4650 CE EUV EPAIII

Low vibration chainsaw with a smooth-running engine, easy to guide and comfortable to use. Good choice for cutting firewood and felling small to medium trees.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg













ZMC5050 C€ ® EuV EPAIII

Light, convenient and durable chainsaw, provide users great experience. Easy to maintain and service. Ideal for gardening, landscaping and construction sites and also suitable for a variety of some hard tasks.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg



Automatic Switch Option









ZMC5450 (€®

Robust and long-lasting chainsaw for all-round use. Good for harvesting wood in medium size, also highly suitable for agriculture, horticulture, orchards.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.0 kg















ZL SERIES ZM4000/ZM4600/ZM4680/ ZM5200/ZM5280/ZM5800

Lightweight, excellent power-to-weight ratio to reduce the sense of fatigue.

ZM4000 (€ € ®

Entry-level, intended to offer a credible response to the needs of discerning home users who want a powerful tool for lopping, pruning, small-medium diameter cutting and general tasks like chopping up firewood.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg











ZM4600 C€ € © EuV EPAIII

These powerful lightweight saws provide high torque even at low RPM and are ideal for any kind of agricultural use such as lopping, collecting firewood, felling and cutting up medium-sized trees.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg













FZOMAX[®] | www.zomaxtool.com

ZM5200 CE EuV EPAIII

Deliver excellent cutting performance, start easily and work with various features which make your operation comfortable and flexible. Ideal for light cutting work including smaller trees and firewood.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg











ZM4680 (& Buv EPAIII

Robust chainsaw for all round use, ideal for farmers, gardening and landscaping applicantions, also suited for private use, very handy, continuous power.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg















ZM5280 (& Buv EPAIII

The saw is characterized by top quality, reliable performance, easy to use and maintenance. The engine's low consumption and linear torque-speed response ensure a premium performance even during extended periods of continuous duty. Good for harvesting wood in medium-density stands.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg











ZM5800 (€ € ®

Equipped with an magnesium crankcase to offer the maximum strength of constant efficiency even with longest guide bars. Designed for the most demanding and prolonged jobs in difficult environment conditions, robust chainsaw for all-round use.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg











Model	ZM4000	ZM4600	ZM4680	ZM5200	ZM5280	ZM5800
Displacement	39.6 cc	45.6 cc	45.6 cc	49.8 cc	49.8 cc	54.0 cc
Rated Power	1.5 kW / 2.0 hp	1.8 kW / 2.4 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Φ41 / 30 mm	Φ43 / 31 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	4.9 kg	5.0 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type					
Ignition System	CDI/DIGITAL	CDI	CDI	CDI	CDI	CDI
Max Speed	11,000 rpm					
Idle Speed	$3,300 \pm 400 \mathrm{rpm}$	3,300 ± 400 rpm	$3,300 \pm 400 \mathrm{rpm}$	$3,300 \pm 400 \mathrm{rpm}$	3,300 ± 400 rpm	3,300 ± 400 rpm
Fuel Capacity	410 ml	520 ml				
Oil Capacity	240 ml	260 ml				
Oil & Fuel Ratio	1:40	1:40	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm) 14" (34cm) 16"(34cm)	16"(40cm) 18" (45cm) 20"(50cm)				

FZOMAX[®] | www.zomaxtool.com



ZB SERIES

ZM6010/6510/6020/6520 /7500/7501/7511

ZMC7511

Heavy duty chainsaw with fuel-efficient engine, ideal for working with medium to large strength wood. Ergonomically improved handles reduce users' fatigue. And advanced air filteration system brings the benefits of reduced maintenance and reliable performance.

eliminate particulate pollution,

reduce wear and extend


cleaning interval period.


Displacement	73.5 cc
Rated Power	3.6 kW / 4.9 hp
Dry Weight	7.1 kg







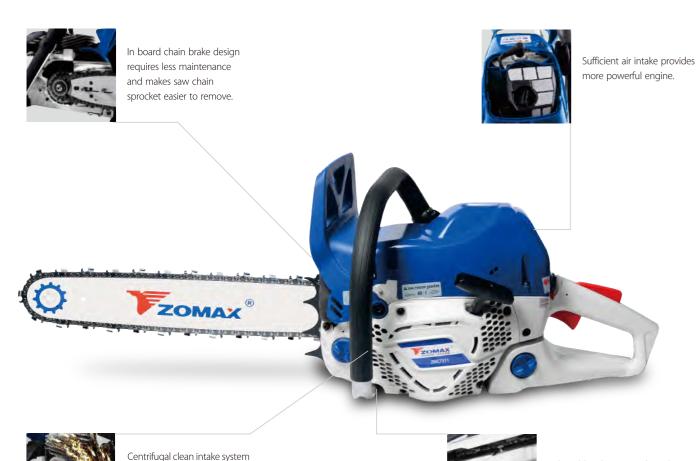



ZM7500/7501 (🕳 🍩

Long-life air filter system and excellent anti-vibration system which enhance quality and cutting performance. Petrol chainsaw for agriculture and horticulture.









ZM6010/6510 (

Design for intensive, continuous work in tough conditions, such as dusty environments or in high ambient temperatures. Highly recommended for harvesting medium to large timber.









ZM6020/6520 (€ € ®

Special ergonomic designs for the chock under three grades for open/semi-open/closed to simplify starting and stopping the machine. Ideal for any kinds of agricultural usages such as lopping, collecting firewood, felling and cutting up medium to large sized timber.









Model	ZM6010/6020	ZM6510/6520	ZM7500/7501	ZM7511
Displacement	59.0 cc	64.1 cc	73.5 cc	73.5 cc
Rated Power	3.0 kW / 4.0 hp	3.3 kW / 4.4 hp	3.2 kW / 4.3 hp	3.6 kW / 4.9 hp
Bore / Stroke	Φ47 / 34 mm	Φ49 / 34 mm	Φ51 / 36 mm	Φ51 / 36 mm
Dry Weight	5.8 kg	6.0 kg	7.1 kg	7.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	12,500 rpm	12,500 rpm	12,500 rpm	12,500 rpm
Idle Speed	3,300 ± 400 rpm			
Fuel Capacity	700 ml	700 ml	720 ml	720 ml
Oil Capacity	350 ml	350 ml	400 ml	400 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	18"(44cm)/20"(50cm) 22" (55cm)/24" (60cm)	18"(44cm)/20"(50cm) 22" (55cm)/24" (60cm)	20"(50cm)/22"(55cm) 24" (60cm)/28" (70cm)	20"(50cm)/22"(55cm) 24" (60cm)/28" (70cm)



By increasing the design of large heat sink at the top, the working temperature of power is obviously reduced, the phenomenon that it is difficult to start at high temperature is reduced, and the life of cylinder is greatly



A two-stage air guide bar is designed, which can effectively cool the front and back parts of the cylinder.



Add the outlet so that the cooling air of the cylinder can accelerate the flow rate and improve the cooling performance of the power.



ZMC5566 CE EUV EPAIII

Upgrade 5566 with bigger power and excellent fuel consumption. Better cooling system makes the working temperature 13% reduced.

splacement	54.5 cc
ited Power	2.6 kW / 3.5 hp
y Weight	5.1 kg













The spark plug ignition electrode is located in the center of the combustion chamber, which is very helpful to "fully ignite the mixture and obtain higher power and lower fuel consumption"

Displacement	54.5 cc
Rated Power	2.6 kW / 3.5 hp
Dry Weight	5.1 kg













compared with previous model.

ZMC5966

Further upgraded from models ZMC5566/ZMC5567, continued to use the new engine technologies and perfectly inherited its advantages of this platform.

Displacement	58.1 cc
Rated Power	3.0 kW / 4.0 hp
Dry Weight	5.2 kg











ZMC5967

20% more Power, Lower working temperature, Less fuel consumption, Higher cutting efficiency, Super quality to price ratio, available for professional use.

Displacement	58.1 cc
Rated Power	3.0 kW / 4.0 hp
Dry Weight	5.2 kg













ZMC2501 (€ ®

Newly developed 25.4cc Top Handle chainsaw, provide great comfort by ergonomic design. Complied with GS standard, safety distance from front handle to handle. 360° fine cuts, light weight, ideal for branch cutting and curving.

Displacement	25.4 cc
Rated Power	0.8 kW / 1.1 hp
Dry Weight	3.2 kg












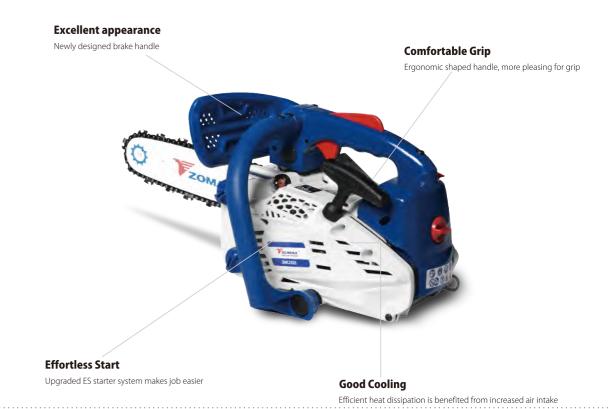



Model	ZMC2501
Displacement	25.4 cc
Rated Power	0.8 kW / 1.1 hp
Bore / Stroke	Ф34 / 28 mm
Dry Weight	3.2 kg
Carburetor	Diaphragm type
Ignition System	CDI
Max Speed	12,500 rpm
Idle Speed	3,300 \pm 300 rpm
Fuel Capacity	400 ml
Oil Capacity	240 ml
Oil & Fuel Ratio	1:40
Bar Lengths	10"(25cm)/12" (30cm)



ZMC4281

Reliability comes from the ergonomic design, processing parts have quality control, strict management, improves quality consistency.

Spring Damping System Upgraded. Shock absorption efficiency increased by 50%




Visible Fuel Tank, more convenience in



Upgraded aluminum alloy Crankcase, more solid and durable, effective protection from falling.



New Engine design, 23% Power boost Low Fuel Consumption Low Cylinder Temperature



ZMC4281 C€ € © EuV

40.2cc chainsaw updated crankcase into high strength Aluminum Alloy material. Upgraded engine design, with EuV version available. Advanced Damping System perfectly help to ease vibration, effectively reduce the the labor intensity of users. More comfortable to enjoy the garden jobs.

1.8 kW / 2.4 hp
4.8 kg











Newly Designed Starter Cover, ES starter available

Easy Start



Model	ZMC4281
Displacement	40.2 cc
Rated Power	1.8 kW / 2.4 hp
Bore / Stroke	Φ40 / 32 mm
Dry Weight	4.8 kg
Carburetor	Diaphragm type
Ignition System	CDI
Max Speed	12,500 rpm
Idle Speed	$3,300 \pm 400 \mathrm{rpm}$
Fuel Capacity	440 ml
Oil Capacity	250 ml
Oil & Fuel Ratio	1:40
Bar Lengths	12"(28cm) 14"(34cm) 16"(38cm)