



ZHEJIANG ZOMAX GARDEN MACHINERY CO.,LTD.

Address: No. 48 Aodihu Road, Taiping Street, Wenling City, Zhejiang Province, China.

Tel: 86 576 8614 6556 / 8614 6558 / 8614 6566

Fax: 86 576 86146567 / 86146568

E-mail: sales@zomaxtool.com

CATALOGUE





Outdoor Power Equipment: Garden & Forestry







About **ZOMAX**

Established in 2005, ZHEJIANG ZOMAX GARDEN MACHINERY CO., LTD, as a subsidiary of ZOMAX Group, is a professional manufacturer of Outdoor Power Garden Machinery, main products including Gasoline Chainsaw, Gasoline Brush Cutter, and 58V Battery Garden Tools, etc. ZOMAX Garden serves as the National High-tech Enterprise and Zhejiang Standard Innovative Enterprise. The products are widely used in fields such as field courtyards, parks, gardens, trees, orchards, tea gardens, and forestry operations.



ZOMAX LOBBY



ZOMAX GEAR WORKSHOP



ZOMAX WAREHOUSE



ZOMAX STAFF CANTEEN



ZOMAX CULTURE CORNER



Perfect Products Manufacture

In the mass production stage, we always adhere to the principle "3 No" to defective products, they are: "No acceptance, No produce, No delivery". By means of the continuous check to make continuous improvement so as to meet users' needs better.









Forceful R&D Team

ZOMAX always take Innovation R&D as the core competitiveness of the enterprise, we have been committed to the research and development of green and environmentally friendly lithium battery products, and low energy cost gas products. Meanwhile, with the unremitting efforts of R&D teams. At present, ZOMAX Garden has won 11 National Invention Patents, over 150 patents for Utility Models and Appearance, and has built the Provincial-level New High-tech Enterprise Research and Development Center.



Gasonne Chamsaws	01-20
Trimmers and Brush Cutters	29-46
Pole Reach Pruners and Trimmers & blower	47-52
58V Lithium-lon Garden Tools	53-79
Accessories	78-80





ZC SERIES ZM4010/ZM4610/ZM5010/ZM5410 Sufficient air flow brings better cooling of the engine.

Paper air-filter offers excellent anti-dust, Suitable for ZM4010, option for ZM4610, ZM5010, ZM5410.



Adjustable oil pump present controllable oil flow. Suitable for ZM4010/4610/5010/ 5410.



Double nylon mesh air filter material, great density provide better anti-dust, easy to clean and maintenance. Suitable for ZM4610/5010/5410.



ZM4010 (€ € ®

Light weight, low-vibration chainsaw, with improved air cooling system to ensure that you can start easily after a short break. Highly suitable for pruning limbs, cutting firewood or taking down a whole small tree.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg











Automatic Switch Option

Robust chainsaws are designed to endure the tough conditions and severe environment. This saw delivers more power and extra durability, thanks to the magnesium alloy crankcase, suitable for cutting firewood.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg















ZM5010 CE EUV EPAIII

Superior quality with charming performance, 2-stroke engine and ignition system ensures fast starts and smooth operation. Easy to maintain and service. Long-life air filter system with air routing. Ideal for ground keeping.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg











Automatic Switch Option

Automatic Switch Option

ZM5410 (€ € ®

Easy to start and control, ideal for those who cut irregularly. Designed to handle multiple cutting tasks. A good choice for craftsmen, farmers and home users.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg

















machine's durability.

Ergonomic and comfortable starter knob promote easy starting. Suitable for ZM4020/4620/5020/5420.



Toggle switch for better durability. Suit well for ZM4020/4620/5020/5420.



Compartable construction design, smart and light-weight. Suitable for ZM4020.



ZM4020 (€ € ®

Upgrade version of the ZM4010, increased power from its optimized design of air induction system, it is a big help with your list of wood cutting chores around the home.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg





ZM4620 CE EUV EPAIII

Mid-range saws with high torque over a wide rpm range for tough cutting, combine the best characteristics of its predecessor with new, facilitating technology and ergonomics. Easy to guide, great handling. Ideal for cutting firewood and for felling of small to medium trees.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg













ZM5020 (E EuV EPAIII

Built to tackle the toughest jobs. Whether you are pruning limbs, cutting firewood or taking down a whole tree, it is designed to provide a long, trouble-free life. you need a chainsaw that starts easily, runs smoothly, and provides years of dependable performance.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg













ZM5420 (€ € ®

Thanks to vibration reduction technology and group control which provide easier access to all functions. More comfortable and controllable. It is certified to the highest level of service life to ensure maximum value of your investment, good for harvesting wood in medium-density stands.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg











Model	ZM4020	ZM4620	ZM5020	ZM5420
Displacement	39.6 cc	45.6 cc	49.8 cc	54.0 cc
Rated Power	1.5 kW / 2.0 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Ф41 / 30 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Idle Speed	3,300 ± 400 rpm	$3,300 \pm 400 \mathrm{rpm}$	$3,300 \pm 400 \mathrm{rpm}$	$3,300 \pm 400 \mathrm{rpm}$
Fuel Capacity	410 ml	520 ml	520 ml	520 ml
Oil Capacity	240 ml	260 ml	260 ml	260 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm)/14"(34cm)/16" (38cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)



ZE SERIES ZM4100/ZM4630/ZM5030/ZM5430 Increased engine power makes cutting more efficient.

Replaceable spiked bumper, more controllable for easier cutting. Ideal for ZM4100.

Fuel primer is available, easy to start. Suitable for ZM4100/4630/ 5030/5430.

Dual protection came from the appliance of metal and plastic chain catcher, safety ensured. Suitable for ZM4630/ZM5030/ ZM5430.







ZM4100 (€ € ®

The digital ignition system ensures a smooth acceleration and running, its air filter with paper element avoids clogging with sawdust, highly suitable for cutting fire-wood and for building timber.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg













Recommended for semi-professional usage, special cylinder treatment brings a powerful engine, exacting demands of high performance, productivity and durability. Designed for the toughest environment to the ranch, farm or anywhere you choose.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg















ZM5030 CE EuV EPAIII

Powerful and lightweight, provide high torque even at low RPM. Convenient and agile. Highly suitable for any kind of agricultural use such as lopping, collecting firewood, felling and cutting up medium sized trees.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg













ZM5430 (€ € ®

Designed to satisfy a wide range of users, from demanding of gardeners requiring a tool for frequent use, to farmers and professional contractors. Power-to-weight ratio ensure excellent cutting performance for any use, from limbing and pruning to cutting medium-sized trunks.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg













Model	ZM4100	ZM4630	ZM5030	ZM5430
Displacement	39.6 cc	45.6 cc	49.8 cc	54.0 cc
Rated Power	1.5 kW / 2.0 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Φ41 / 30 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Idle Speed	$3,300\pm400~\mathrm{rpm}$	3,300 ± 400 rpm	$3,300 \pm 400 \mathrm{rpm}$	$3,300 \pm 400 \mathrm{rpm}$
Fuel Capacity	410 ml	520 ml	520 ml	520 ml
Oil Capacity	240 ml	260 ml	260 ml	260 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm)/14"(34cm)/16" (38cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)





Ergonomic designed lock, easy to open or tighten.



Flexible, safe and reliable switch, easy to operate. Suitable for ZMC4601/ZMC5001 /ZMC5401



Unique designed flywheel blade, prolong life by adequate intake air volume and powerful engine. Suitable for ZMC4601/ZMC5001 /ZMC5401



ZMC4002 (€ € ®

A big improvement has been made for the double cylinder of internal engine, reduce the oil consumption and temperature. It has bilateral oil seal with itself, strengthen the leak proofness of the engine and shrink the compress volume of crankcase. Light plastic crankcase. Anti-freezing material is available, even works at -40°C. With improved muffler air structure, the chainsaw can run in high speed with lower temperature and efficient in fuel consumption, both practical and economical.

Displacement	39.6 cc
Rated Power	1.6 kW / 2.2 hp
Dry Weight	4.3 kg









Efficiency Brake



ZMC4601 (E BUV EPAIII

Apart from the good looking of the overall design, the performance of the engine $\,$ is incredible. Low-profile but hard wearing. It's operation is strictly designed comply with the human experience data. Excellent and comfortable operation experience for the users. The ideal saw for ground keeping.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg











ZMC5001 CE EUV EPAIII

Robust chainsaw for home using, with new eye-catching appearance, a new series for your choice, suitable item for light or medium daily cutting.

Pisplacement	49.8 cc
ated Power	2.0 kW / 2.7 hp
Pry Weight	5.0 kg











An updated outlook for 54cc chainsaw, with the revised starter cover, a better cooling system is build to cope with different working conditions. Idea for handle multiple cutting tasks.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg









Model	ZMC4002	ZMC4601	ZMC5001	ZMC5401
Displacement	39.6 cc	45.6 cc	49.8 cc	54.0 cc
Rated Power	1.6 kW / 2.2 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Ф41 / 30 mm	Ф43 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Idle Speed	$3,300 \pm 400 \mathrm{rpm}$	3,300 ± 400 rpm	$3,300 \pm 400 \mathrm{rpm}$	$3,300 \pm 400 \mathrm{rpm}$
Fuel Capacity	480 ml	520 ml	520 ml	520 ml
Oil Capacity	240 ml	260 ml	260 ml	260 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm)/14"(34cm)/16" (38cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)	16"(40cm)/18" (45cm)/20" (50cm)



ZV SERIES ZMC4003/ZMC4650/ZMC5050/ZMC5450

The most valuable choice for users.

The most valuable choice for users.

Easy starter system for option, suitable for ZMC4003/ ZMC4650/ZMC5050/ ZMC5450



Tootless oil/fuel tank cap, easy to open or tighten, Suitable for ZMC4003/ ZMC4650/ ZMC5050/ZMC5450



Complied with GS standard, safe distance from brake level to front hand guard, easy to operate. Suitable for ZMC4003/ZMC4650/ ZMC5050/ZMC5450.



ZMC4003 (€ € ®

The kernel component has upgrade, like cylinder, crankcase bearing, oil seal, muffler, manifold and so on, bring you different feelings when sawing. New appearance make you feel fresh and cool. The engine has improved, power become higher, fuel consumption become lower, and it reduces the temperature.

Displacement	39.6 cc
Rated Power	1.6 kW / 2.2 hp
Dry Weight	4.3 kg











ZMC4650 CE EUV EPAIII

Low vibration chainsaw with a smooth-running engine, easy to guide and comfortable to use. Good choice for cutting firewood and felling small to medium trees.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg











** www.zomaxtool.com

ZMC5050 C€ ® EuV EPAIII

Light, convenient and durable chainsaw, provide users great experience. Easy to maintain and service. Ideal for gardening, landscaping and construction sites and also suitable for a variety of some hard tasks.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg



Automatic Switch Option









ZMC5450 (€®

Robust and long-lasting chainsaw for all-round use. Good for harvesting wood in medium size, also highly suitable for agriculture, horticulture, orchards.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.0 kg















ZL SERIES ZM4000/ZM4600/ZM4680/

Lightweight, excellent power-to-weight ratio to reduce the sense of fatigue.

ZM4000 (€ € ®

Entry-level, intended to offer a credible response to the needs of discerning home users who want a powerful tool for lopping, pruning, small-medium diameter cutting and general tasks like chopping up firewood.

Displacement	39.6 cc
Rated Power	1.5 kW / 2.0 hp
Dry Weight	4.3 kg











ZM4600 C€ € © EuV EPAIII

These powerful lightweight saws provide high torque even at low RPM and are ideal for any kind of agricultural use such as lopping, collecting firewood, felling and cutting up medium-sized trees.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg











ZM5200 CE EuV EPAIII

Deliver excellent cutting performance, start easily and work with various features which make your operation comfortable and flexible. Ideal for light cutting work including smaller trees and firewood.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg











ZM4680 (& Buv EPAIII

Robust chainsaw for all round use, ideal for farmers, gardening and landscaping applicantions, also suited for private use, very handy, continuous power.

Displacement	45.6 cc
Rated Power	1.8 kW / 2.4 hp
Dry Weight	4.9 kg















ZM5280 (& Buv EPAIII

The saw is characterized by top quality, reliable performance, easy to use and maintenance. The engine's low consumption and linear torque-speed response ensure a premium performance even during extended periods of continuous duty. Good for harvesting wood in medium-density stands.

Displacement	49.8 cc
Rated Power	2.0 kW / 2.7 hp
Dry Weight	5.0 kg











ZM5800 (€ € ®

Equipped with an magnesium crankcase to offer the maximum strength of constant efficiency even with longest guide bars. Designed for the most demanding and prolonged jobs in difficult environment conditions, robust chainsaw for all-round use.

Displacement	54.0 cc
Rated Power	2.2 kW / 3.0 hp
Dry Weight	5.1 kg











Model	ZM4000	ZM4600	ZM4680	ZM5200	ZM5280	ZM5800
Displacement	39.6 cc	45.6 cc	45.6 cc	49.8 cc	49.8 cc	54.0 cc
Rated Power	1.5 kW / 2.0 hp	1.8 kW / 2.4 hp	1.8 kW / 2.4 hp	2.0 kW / 2.7 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp
Bore / Stroke	Ф41 / 30 mm	Φ43 / 31 mm	Φ43 / 31 mm	Φ45 / 31 mm	Φ45 / 31 mm	Φ45.2 / 34 mm
Dry Weight	4.3 kg	4.9 kg	4.9 kg	5.0 kg	5.0 kg	5.1 kg
Carburetor	Diaphragm type					
Ignition System	CDI/DIGITAL	CDI	CDI	CDI	CDI	CDI
Max Speed	11,000 rpm					
Idle Speed	$3,300 \pm 400 \mathrm{rpm}$	3,300 ± 400 rpm				
Fuel Capacity	410 ml	520 ml				
Oil Capacity	240 ml	260 ml				
Oil & Fuel Ratio	1:40	1:40	1:40	1:40	1:40	1:40
Bar Lengths	12"(28cm) 14" (34cm) 16"(34cm)	16"(40cm) 18" (45cm) 20"(50cm)				



ZB SERIES

ZM6010/6510/6020/6520 /7500/7501/7511

ZMC7511

Heavy duty chainsaw with fuel-efficient engine, ideal for working with medium to large strength wood. Ergonomically improved handles reduce users' fatigue. And advanced air filteration system brings the benefits of reduced maintenance and reliable performance.

reduce wear and extend

cleaning interval period.

Displacement	73.5 cc
Rated Power	3.6 kW / 4.9 hp
Dry Weight	7.1 kg





precise oil supply. Prolong the

service life, powerful in cutting.





Long-life air filter system and excellent anti-vibration system which enhance quality and cutting performance. Petrol chainsaw for agriculture and horticulture.









ZM6010/6510 (

Design for intensive, continuous work in tough conditions, such as dusty environments or in high ambient temperatures. Highly recommended for harvesting medium to large timber.









ZM6020/6520 (€ € ®

Special ergonomic designs for the chock under three grades for open/semi-open/closed to simplify starting and stopping the machine. Ideal for any kinds of agricultural usages such as lopping, collecting firewood, felling and cutting up medium to large sized timber.









Model	ZM6010/6020	ZM6510/6520	ZM7500/7501	ZM7511
Displacement	59.0 cc	64.1 cc	73.5 cc	73.5 cc
Rated Power	3.0 kW / 4.0 hp	3.3 kW / 4.4 hp	3.2 kW / 4.3 hp	3.6 kW / 4.9 hp
Bore / Stroke	Φ47 / 34 mm	Φ49 / 34 mm	Φ51 / 36 mm	Φ51 / 36 mm
Dry Weight	5.8 kg	6.0 kg	7.1 kg	7.1 kg
Carburetor	Diaphragm type	Diaphragm type	Diaphragm type	Diaphragm type
Ignition System	CDI/DIGITAL	CDI	CDI	CDI
Max Speed	12,500 rpm	12,500 rpm	12,500 rpm	12,500 rpm
Idle Speed	3,300 ± 400 rpm			
Fuel Capacity	700 ml	700 ml	720 ml	720 ml
Oil Capacity	350 ml	350 ml	400 ml	400 ml
Oil & Fuel Ratio	1:40	1:40	1:40	1:40
Bar Lengths	18"(44cm)/20"(50cm) 22" (55cm)/24" (60cm)	18"(44cm)/20"(50cm) 22" (55cm)/24" (60cm)	20"(50cm)/22"(55cm) 24" (60cm)/28" (70cm)	20"(50cm)/22"(55cm) 24" (60cm)/28" (70cm)

** www.zomaxtool.com



ZMC5566/ZMC5567/ZMC5966/ZMC5967

Chainsaw for grouds maintenance. Up to 12% less consumption and up to 13% lower emission compared with previous model.

By increasing the design of large heat sink at the top, the working temperature of power is obviously reduced, the phenomenon that it is difficult to start at high temperature is reduced, and the life of cylinder is greatly



A two-stage air guide bar is designed, which can effectively cool the front and back parts of the cylinder.



Add the outlet so that the cooling air of the cylinder can accelerate the flow rate and improve the cooling performance of the power.



ZMC5566 CE EUV EPAIII

Upgrade 5566 with bigger power and excellent fuel consumption. Better cooling system makes the working temperature 13% reduced.

isplacement	54.5 cc
ated Power	2.6 kW / 3.5 hp
ry Weight	5.1 kg













The spark plug ignition electrode is located in the center of the combustion chamber, which is very helpful to "fully ignite the mixture and obtain higher power and lower fuel consumption"

Displacement	54.5 cc
Rated Power	2.6 kW / 3.5 hp
Dry Weight	5.1 kg















ZMC5966

Further upgraded from models ZMC5566/ZMC5567, continued to use the new engine technologies and perfectly inherited its advantages of this platform.

Displacement	58.1 cc
Rated Power	3.0 kW / 4.0 hp
Dry Weight	5.2 kg











ZMC5967

20% more Power, Lower working temperature, Less fuel consumption, Higher cutting efficiency, Super quality to price ratio, available for professional use.

Displacement	58.1 cc
Rated Power	3.0 kW / 4.0 hp
Dry Weight	5.2 kg












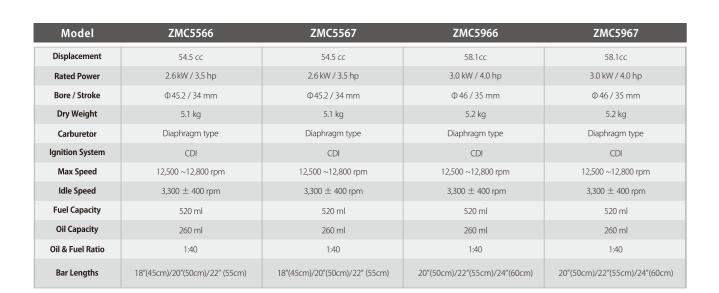

ZMC2501 (€ @

Newly developed 25.4cc Top Handle chainsaw, provide great comfort by ergonomic design. Complied with GS standard, safety distance from front handle to handle. 360° fine cuts, light weight, ideal for branch cutting and curving.

Displacement	25.4 cc
Rated Power	0.8 kW / 1.1 hp
Dry Weight	3.2 kg












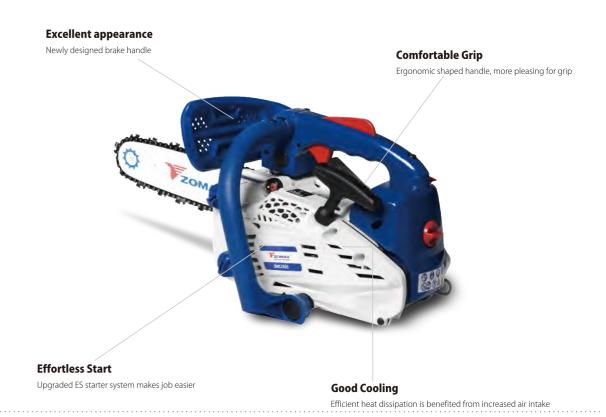



Model	ZMC2501	
Displacement	25.4 cc	
Rated Power	0.8 kW / 1.1 hp	
Bore / Stroke	Φ34 / 28 mm	
Dry Weight	3.2 kg	
Carburetor	Diaphragm type	
Ignition System	CDI	
Max Speed	12,500 rpm	
Idle Speed	$3,300 \pm 300 \mathrm{rpm}$	
Fuel Capacity	400 ml	
Oil Capacity	240 ml	
Oil & Fuel Ratio	1:40	
Bar Lengths	10"(25cm)/12" (30cm)	

FZOMAX 8 | www.zomaxtool.com



ZMC4281

Reliability comes from the ergonomic design, processing parts have quality control, strict management, improves quality consistency.

Spring Damping System Upgraded. Shock absorption efficiency increased by 50%



Visible Fuel Tank, more convenience in operation



Upgraded aluminum alloy Crankcase, more solid and durable, effective protection from falling.



New Engine design, 23% Power boost Low Fuel Consumption Low Cylinder Temperature



ZMC4281 C€ € © EuV

40.2cc chainsaw updated crankcase into high strength Aluminum Alloy material. Upgraded engine design, with EuV version available. Advanced Damping System perfectly help to ease vibration, effectively reduce the the labor intensity of users. More comfortable to enjoy the garden jobs.

Displacement	40.2 cc	
Rated Power	1.8 kW / 2.4 hp	
Dry Weight	4.8 kg	
AUTO FUEL PRIME	ES (Ignillon)	





Model	ZMC4281
Model	ZIMC4201
Displacement	40.2 cc
Rated Power	1.8 kW / 2.4 hp
Bore / Stroke	Ф40 / 32 mm
Dry Weight	4.8 kg
Carburetor	Diaphragm type
Ignition System	CDI
Max Speed	12,500 rpm
Idle Speed	$3,300 \pm 400 \mathrm{rpm}$
Fuel Capacity	440 ml
Oil Capacity	250 ml
Oil & Fuel Ratio	1:40
Bar Lengths	12"(28cm) 14"(34cm) 16"(38cm)





ENGINES FAMILY

2 Stroke Engine: 25.4cc/32.6cc

42.7cc/51.7cc

4 Stroke Engine: 35.8cc

Variable engines meet your different demands.

4 STROKE ENGINE EUV EPAIII

4 stroke engine uses overhead CAM mechanism, smooth operation, little vibration, low noise, through the optimization of oil system, lubrication system, distribution agencies, heavy parts material, to improve gasoline engine combustion efficiency and to prolong service life. EUII past without any catalyst. Belongs to the low temperature, energy saving, environmental protection engine.

Displacement	35.8 cc	
Model	139F	
Rated Power	0.8 kW / 1.0 hp	
Engine	4 Stroke	







Double-deck design of muffler cover with heat shield inside.



PA6 material fuel tank protector

1E34F EuV EPAIII **2** stroke

25.4 cc
Ф34 / 28 mm
0.8 kW / 1.0 hp
11,000 rpm
3,000 ± 300 rpm
500 ml



1E36F EuV EPAIII 2 stroke

Displacement	32.6 cc
Bore / Stroke	Φ36 / 32 mm
Rated Power	0.9 kW / 1.2 hp
Max Speed	10,000 rpm
Idle Speed	$3,000 \pm 300 \mathrm{rpm}$
Fuel Tank Capacity	650 ml



1E40F/1E44F EuV EPAIII 2 stroke

Displacement	42.7 cc	51.7 cc
Bore / Stroke	Φ40 / 34 mm	Φ44 / 34 mm
Rated Power	1.25 kW / 1.7 hp	1.4 kW / 1.9 hp
Max Speed	10,000 rpm	10,000 rpm
Idle Speed	$3,000 \pm 300 \mathrm{rpm}$	$3,000 \pm 300 \mathrm{rpm}$
Fuel Tank Capacity	700 ml	700 ml



1E40FA/1E44FA EuV EPAIII 2 stroke

Displacement	42.7 cc	51.7 cc
Bore / Stroke	Φ40 / 34 mm	Φ44 / 34 mm
Rated Power	1.35 kW / 1.8 hp	1.5 kW / 2.0 hp
Max Speed	11,000 rpm	10,000 rpm
Idle Speed	$3,\!000 \pm 300 \mathrm{rpm}$	$3,000 \pm 300 \mathrm{rpm}$
Fuel Tank Capacity	900 ml	900 ml





31/32



ZMG2602 (€ € ® EuV EPA III

ZMG2602 has an upgraded engine, is right tool for you to trim rough grass around corners, mail boxes, walls and fences. Gear box and guard design reduce the weight to improve confort. Terse but forceful.













Woollen Air Filter

Tight sealed structure is excellent in dust prevention, but easy to open.







Plastic Clutch Com. for lighter weight.



Brand new driver box Assy No gap between driver box and trimmer head, effectively reduces the risk of grass



ZMG2602N2PC

Ideal for trimming edges, working in narrow areas difficult to reach with lawn mowers or tractors to keep your garden tidy and clean.Offer maximimum efficiency to allow you to work safely and effortlessly, give you the satisfaction of having a garden perfect in any detail.


25.4 cc	
0.8 kW / 1.0 hp	
5.0 kg	
2 stroke	









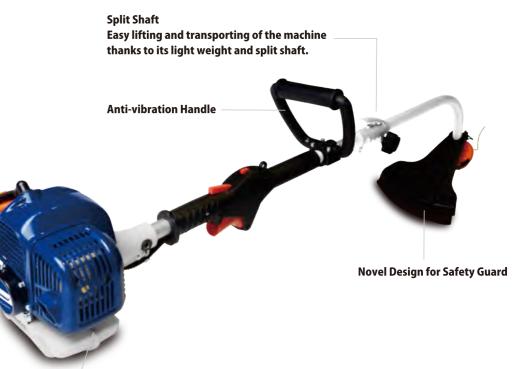

Durable Fuel Tank with PA6 Material

Model	ZMG2602	ZMG2602N2PC
Bore (mm)	Ф34	Ф34
Stroke (mm)	28	28
Displacement (ml)	25.4	25.4
Rated Power (kW)	0.8	0.8
Max Speed (rpm)	11,000	11500±500
Idle Speed (rpm)	$3,000 \pm 300$	3,000 ± 300
Fuel Tank Capacity (ml)	500	500
Dry Weight (kg)	4.95	5.0
Transmission System	Clutch + Hard Shaft + Gearbox	Clutch + Hard Shaft + Gearbox
Working Shaft Lengths (mm)	1,500	660
Curved Shaft Lengths (mm)	/	660
Working Shaft Dia. (mm)	24	26
Drive Shaft Dia. (mm)	7	6
Shaft Teeth	7	/



02 SERIES

ZMG2602/ZMG3302/ZMG4302/ ZMG5302/ZMG3601

Straight working shaft offers a more efficient delivery of the power to the cutting head.


ZMG3302 CE EUV EPAIII


To represent 02 SERIES, ZMG3302 is a fuel-efficient powerful trimmer, equipped with straight shaft and U handle. it has perfect balance and an excellent power to weight ratio. High torque for durable operation, specailly designed for heavy duty tasks. More, loop handle and detachable shaft versions available for all 02








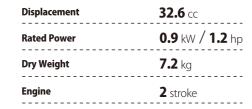

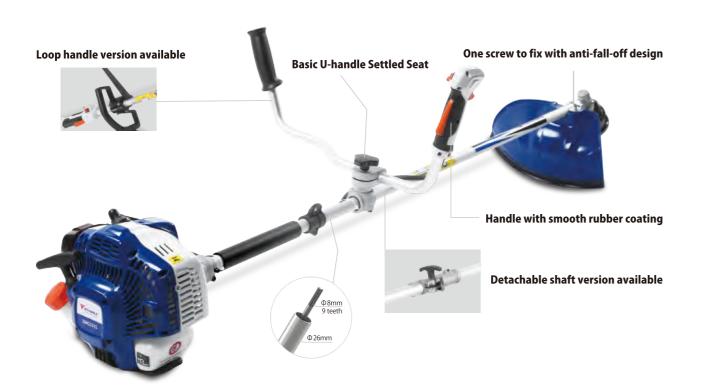

Suitable for following landforms







Using dedicated gasoline and oil not

Emptying petrol and oil for long-term storage

only ensures the stability of the machine, but also is more advantageous to lengthen machine life.

ZMG4302/5302 (€ € ® EuV E

Working in professional protective equipment

splacement	42.7 cc	51.7 cc
re / Stroke	0.40 / 34 mm	Φ44 / 34 mm
ted Power		1.4 kW / 1.9 hp
x Speed	10,000 rpm	10,000 rpm
e Speed	3.000 ± 300 rpm	
1. 1.6 1.		
y Weight		7.5 kg
ansmission System	Clutch+Hard Shaft+Gearbox	
	1,500 mm	1,500 mm



ZMG3601 (E BuV EPA III 4 stroke

Displacement	35.8 cc
Dawa (Charles	Ф39 / 30 mm
Rated Power	0.9 kW / 1.0 hp
May Spood	9,000 rpm
Idla Spaad	$3{,}000 \pm 300 \mathrm{rpm}$
Fuel tank Capacity	650 ml
Dry Weight	7.7 kg
Transmission System	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,500 mm

■ Model + "T": Low emission engine with catalyst. Naming example: ZMG3302T

■ Dry weight is without cutting attachments and safety guard.

■ Reference weight: safety guard 390g, nylon head 360g, 3T blade 255g.

■Carton Diamension: 184*28.5* (10/28.5)cm whole packing, 62.5*22*26.5cm+167.5*13*14cm separating packing.

















PZOMAX ® | www.zomaxtool.com



03 SERIES

ZMG3303/4303/5303/3603

The added cluch cover with rubber surface extends the contact area to reduce the vibration, it relieves the fatigue of waist well. More easier adjust handle swivels for easy storage and transport.

ZMG4303 (E C EUV EPA III

Compared with 02 SERIES, the extra anti-vibration system clutch cover brings more confortable. With Easy starter, ergonomic bike handle and professional-grand trimmer angle for working on large areas of tough grass.












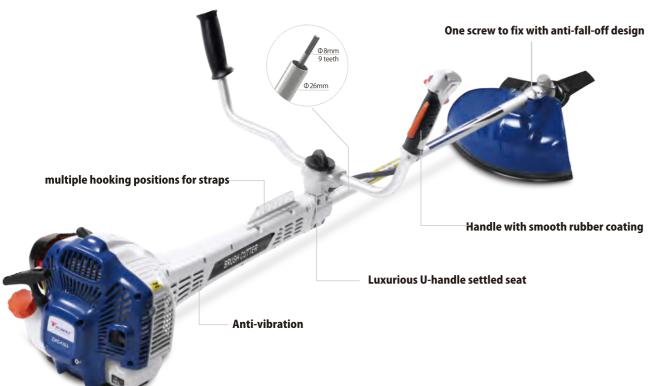

Displacement	32.6 cc
Bore / Stroke	Ф36 /33
Rated Power	0.9 kW / 1.2 hp
Max Speed	10,000 rpm
Idle Speed	$3.000 \pm 300 \text{rpm}$
Fuel tank Capacity	650 mal
Dry Weight	8.1 ka
Transmission System	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,500 mm



Displacement	42.7 cc	51.7 cc
Bore / Stroke	Φ40 / 34 mm	Φ44 / 34 mm
Rated Power	1.25 kW / 1.7 hp	1.4 kW / 1.9 hp
Max Speed	10.000 rpm	10,000 rpm
Idle Speed	$3,000 \pm 300 \mathrm{rpm}$	$3,000 \pm 300 \mathrm{rpm}$
Fuel tank Capacity	700 ml	700 ml
Dry Weight	8.4 kg	8.4 kg
Transmission System	Clutch+Hard Shaft+Gearbox	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,500 mm	1,500 mm



ZMG3603 (€ € ® EuV EPA III 4 stroke

35.8 cc
Ф39 / 30 mm
0.8 kW / 1.0 hp
9,000 rpm
$3,000 \pm 300 \mathrm{rpm}$
650 ml
8.6 kg
Clutch+Hard Shaft+Gearbox
1,500 mm



■ Model + "T": Low emission engine with catalyst. Naming example: ZMG3302T









[■] Dry weight is without cutting attachments and safety guard.

[■] Reference weight: safety guard 390g, nylon head 360g, 3T blade 255g.

[■]Carton Diamension: 184*28.5* (10/28.5)cm whole packing.





05 SERIES

ZMG3305/4305/5305/3605

Backpack brush cutter suitable for farm-oriented properties, luxurious backpack with stable engine seat helps to reduce operator fatigue and provides a more confortable working experience.

Displacement

Rated Power

Dry Weight

Engine

ZMG5305 CE EUV EPAIII

The backpack brush cutter fixed engine on the support of ergonomic harness, not only keep the operator balance, but reduce the strain on the shoulders . with soft shaft part and loop handle, it can make quick work of those hard to reach areas mowers leave behind.









One screw to fix with anti-fall-off design

Simple backpack version available

51.7 cc


11.0 kg

1.4 kW / **1.9** hp

2 stroke



ZMG3305 (E EuV EPA III 2 stroke

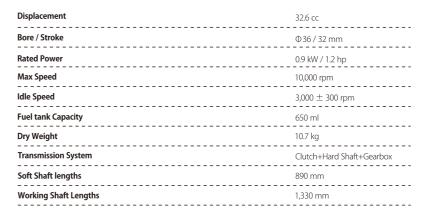



FUEL Ignition C.D.I

Displacement	42.7 cc	51.7 cc
Bore / Stroke	Ф40 / 34 mm	Φ44 / 34 mm
Rated Power	1.25 kW / 1.7 hp	1.4 kW / 1.9 hp
Max Speed	10,000 rpm	10,000 rpm
Idle Speed	3,000 ± 300 rpm	$3,000 \pm 300 \mathrm{rpm}$
Fuel tank Capacity	700 ml	700 ml
Dry Weight	11.0 kg	11.0 kg
Transmission System	Clutch+Hard Shaft+Gearbox	Clutch+Hard Shaft+Gearbox
Soft Shaft lengths	890 mm	890 mm
Working Shaft Lengths	1,330 mm	1,330 mm



ZMG3605 (E EuV EPA III 4 stroke

Displacement	35.8 cc
Bore / Stroke	Φ39 / 30 mm
Rated Power	08 kW / 10 hp
Max Speed	9,000 rpm
Idle Speed	3,000 \pm 300 rpm
Fuel tank Capacity	650 ml
Dry Weight	11.2 kg
Transmission System	Clutch+Hard Shaft+Gearbox
Soft Shaft lengths	890 mm
Working Shaft Lengths	1,330 mm





■ Model + "T": Low emission engine with catalyst. Naming example: ZMG3302T

■ Dry weight is without cutting attachments and safety guard.

■ Reference weight: safety guard 390g, nylon head 360g, 3T blade 255g.

■ Carton Diamension: 38*28*60cm+153*13*10.5cm.







FZOMAX ® | www.zomaxtool.com



06 SERIES

ZMG3306/4306/5306/3606

- Rotating shaft design makes the connecting with engine more flexible. Easy to control the bike handle.
- 2.0mm thinkness shaft can take more tough tasks.

35.8 cc


ZMG3606 CE EUV EPA III

Equipped with lastest developed 4-stroke engine (139F), ZMG3606 is featured by low vibration and less noise. Its new design multihole clutch better to air cooling. The flexible rotating shaft can find a confort cutting angle for you. It makes bike handle control almost effortless. Seriously consider the strong trimmer from Zomax professional line.



design multihole clutch		
3	Rated Power	0.8 kW / 1.0 hp
can find a confort		
rol almost effortless.	Dry Weight	7.8 kg
nax professional line.		
	Engine	4 stroke

Displacement

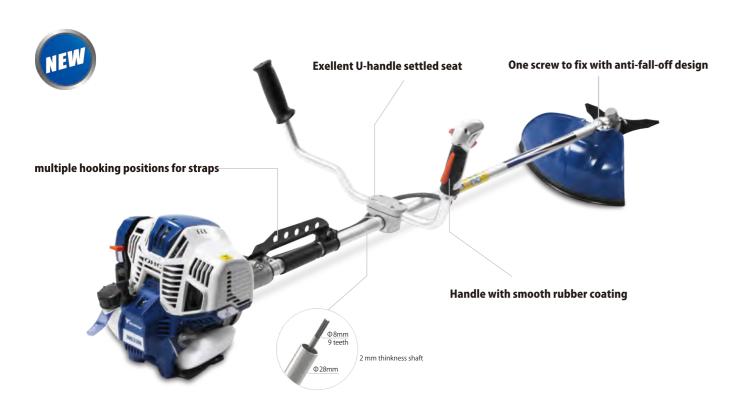

ZMG3306 (E EuV EPA III 2 stroke

Displacement	32.6 cc
Bore / Stroke	Φ26 / 22 mm
Rated Power	0.0 kW / 1.2 hp
Max Speed	10.000 rpm
Idle Speed	$3.000 \pm 300 \text{rpm}$
Fuel tank Capacity	650 001
Dry Weight	7.3 kg
Transmission System	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,500 mm



FUEL Ignition ES

Displacement	42.7 cc	51.7 cc
Bore / Stroke	Φ40 / 34 mm	Φ44 / 34 mm
Rated Power	1.25 kW / 1.7 hp	1.4 kW / 1.9 hp
	10,000 rpm	10,000 rpm
Idle Speed	$3,\!000 \pm 300 \mathrm{rpm}$	$3,000 \pm 300 \mathrm{rpm}$
	700 ml	700 ml
Dry Weight	7.6 kg	7.6 kg
Transmission System	Clutch+Hard Shaft+Gearbox	Clutch+Hard Shaft+Gearbox
	1,500 mm	1,500 mm





- $\blacksquare \mathsf{Model} + "T" : \mathsf{Low} \ \mathsf{emission} \ \mathsf{engine} \ \mathsf{with} \ \mathsf{catalyst.} \ \mathsf{Naming} \ \mathsf{example} : \mathsf{ZMG3302T}$
- Dry weight is without cutting attachments and safety guard.
- Reference weight: safety guard 390g, nylon head 360g, 3T blade 255g.
- Carton Diamension: 184*28.5* (10/28.5)cm whole packing.

■ Standard Accessory:













12 SERIES

ZMG4312/ZMG5312/ZMG4313/ ZMG5313/ZMG4315/ZMG5315

- Split Starter Cover design, easy for maintenance.
- Upright Spark Plug design, improve ignition efficiency.


ZMG4312 C€ ← ⊕ EuV

New upgade engine with new technology provides outstanding cutting performance, plenty of torgue and fuel savings up to 15% compared with 02 series. Easy starting is achieved by primer on side and ergonomic optional bike handle makes work more enjoyable.











Lengthen connecting increasing fixed force, reducing deflection and vibration of transmission rod





FUEL Ignition C.D.I

ZMG4313/5313 (€ ♠ ⊕ EuV 2 stroke

Displacement	42.7 cc	51.7 cc
Bore / Stroke		
Rated Power		
Max Speed		10,000 rpm
Idle Speed	$3,000 \pm 300 \mathrm{rpm}$	$3,\!000 \pm 300 \mathrm{rpm}$
Fuel tank Capacity	900 ml	900 ml
	8.5 kg	8.5 kg
Transmission System	Clutch+Hard Shaft+Gearbox	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,500 mm	1,500 mm



FUEL PRIMER C.D.I TORQUE ES

FUEL PRIMER C.D.I PROQUE

Displacement	42.7 cc	51.7 cc
Bore / Stroke	Φ40 / 34 mm	Φ44 / 34 mm
Rated Power	1.35 kW / 1.8 hp	1.5 kW / 2.0 hp
Max Speed	11,000 rpm	10,000 rpm
Idle Speed	$3,000 \pm 300 \mathrm{rpm}$	$3,000 \pm 300 \text{rpm}$
Fuel tank Capacity	900 ml	900 ml
Dry Weight	9.9 kg	9.9 kg
Transmission System	Clutch+Hard Shaft+Gearbox	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,330 mm	1,330 mm



■ Model + "T": Low emission engine with catalyst. Naming example: ZMG3302T

■ Dry weight is without cutting attachments and safety guard ■Carton Diamension: 184*28.5* (10/28.5)cm whole packing.

■Reference weight: safety guard 390g, nylon head 360g, 3T blade 255g.

■ Standard Accessory







9 teeth / 9 teeth ■ Ф28 mm / 28 mm







45 SERIES

ZMG4502/ZMG4503/4505

- Split Starter Cover design, easy for maintenance.
- Upright Spark Plug design, improve ignition efficiency.


Upgraded Engine with new Technology provides outstanding cutting performance, 30% power boost and less weight guarantee smoothly using in heavy duty jobs. Equipped with Easy Starter and Fuel Primer, enable your start more comfortable.







Displacement	41.5 cc
Rated Power	1.6 kW / 2.2 hp
Dry Weight	6.6 kg
Engine	2 stroke

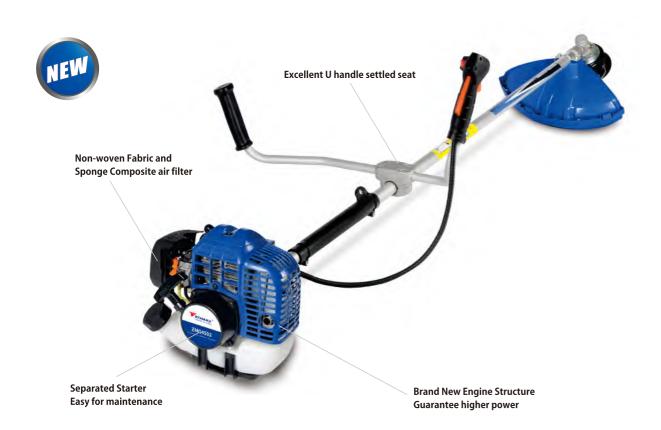

ZMG4502


CE EuV 2 stroke










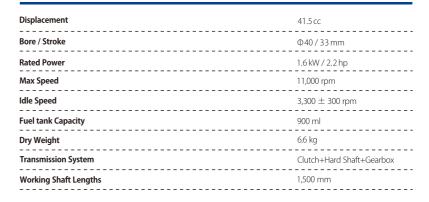



ZMG4503

(€ © EuV **2** stroke











Displacement	41.5 cc
Bore / Stroke	Φ40 / 33 mm
Rated Power	1.61111/12.21
Max Speed	11.000 rpm
Idle Speed	3.300 ± 300 rpm
Fuel tank Capacity	900 ml
Dry Weight	7.6 kg
Transmission System	Clutch+Hard Shaft+Gearbox
Working Shaft Lengths	1,500 mm



ZMG4505

CE

€ 😂	emc	EuV	2 stroke
-----	-----	-----	-----------------

41.5 cc
Φ40/33 mm
1.6 kW / 2.2 hp
11,000 rpm
3,300 ± 300 rpm
900 ml
9.0 kg
Clutch+Hard Shaft+Gearbox
1,500 mm











■ 9 teeth / 9 teeth ■ Ф28 mm / 28 mm

■ Standard Accessory











Accessories & head Option

Item Code: 01-H

Basic support-single harness

The single harness provides the basic support with padding built into the shoulder strap for additional comfortable. Suitable for light weight machine.





Item Code: 05-H

Double shoulder harness

With a shield design as a soft, a more comfortable touching to your hip.



Double shoulder harness

For conveniently transporting tools, features two sections and can be easily attached to the universal and forestry harnesses.





Item Code: 12-H

Double shoulder harness

New advance plus universal harness.



Auto cut mowing headHead tapping, and line automatically mowing, for cutting tall grass.

For cutting medium to short tangled grass with evenly distributed vegetation.



2 teeth grass cutting blade

For thick vegetation, rough grass cutting.



3 teeth grass cutting knife

For thinning and cutting brush wood, under wood or thick thorny hedges.



3 teeth grass cutting blade

For thick bushes, thin tree or weeds cutting.



80 teeth grass cutting blade



ZMG2602 Multifunction ()

A good partner, with the most cost-effective, meet all the requirements of the gardener, pole pruner, long reach hedge trimmer, bush cutter, grass trimmer, flexible shaft, thinkable for your storage and transportation.



Pole Reach Pruners and Trimmers












Displacement	25.4 cc	
Rated Power	0.7 kW / 0.9 hp	
Dry Weight	10.3 kg	
Engine	2 stroke	

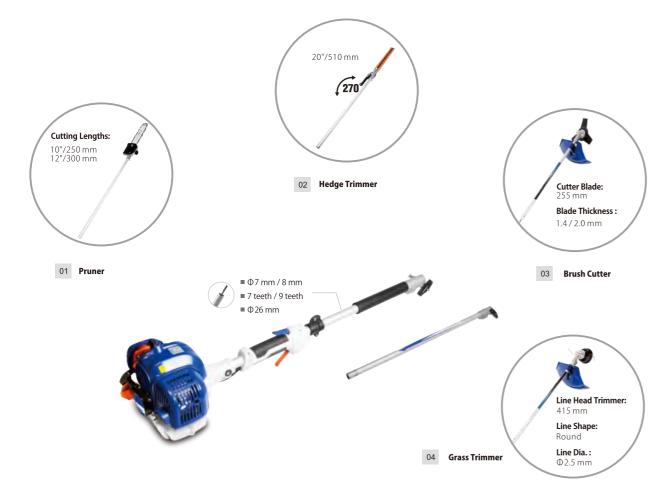



Bore	Φ34 mm
Stroke	28 mm
Displacement	25.4 cc
Rated Power	0.7 kW
Max Speed	11,500 rmp
Idle Speed	3,000±300 rmp
Fuel Tank Capacity	500 ml
Oil Tank Capacity	137 ml
Dry Weight	10.3 kg
Transmission System	Clutch + Hard Shaft+ Gearbox
Working Shaft Lengths	745+745 mm

ZMB5601/5801

Can be used for snow blowing, road leaf cleaning, grassland garbage cleaning, fire extinguishing, etc. Product configuration crankcase intake technology, high power, fast wind speed; easy starter; equipped with machinery using conventional handle mode, good shock absorption effect; at the same time, increase the belt configuration, reduce the load of both hands.

Displacement	25.4 cc	
Rated Power	0.7 kW / 0.9 hp	
Dry Weight	7.3 kg	
Engine	2 stroke	






Applied the patented crankcase intake technology, ensures larger power and faster speed.



Equipped with easy starting device for ease

Model	ZMB5601/5603	ZMB5801/5803
Displacement	54.5 cc	56.5 cc
Rated Power	2.6 kW / 3.5 hp	2.8 kW / 3.8 hp
Bore / Stroke	Φ45.2 / 34 mm	Φ46 / 34 mm
Dry Weight	7.3 kg	7.3 kg
Carburetor	Diaphragm type	Diaphragm type
Ignition System	CDI	CDI
Max Speed	8,500 rpm	8,800 rpm
Fuel Capacity	450 ml	450 ml
Oil Capacity	1:40	1:40
Max Air Speed	75 m/s	80 m/s

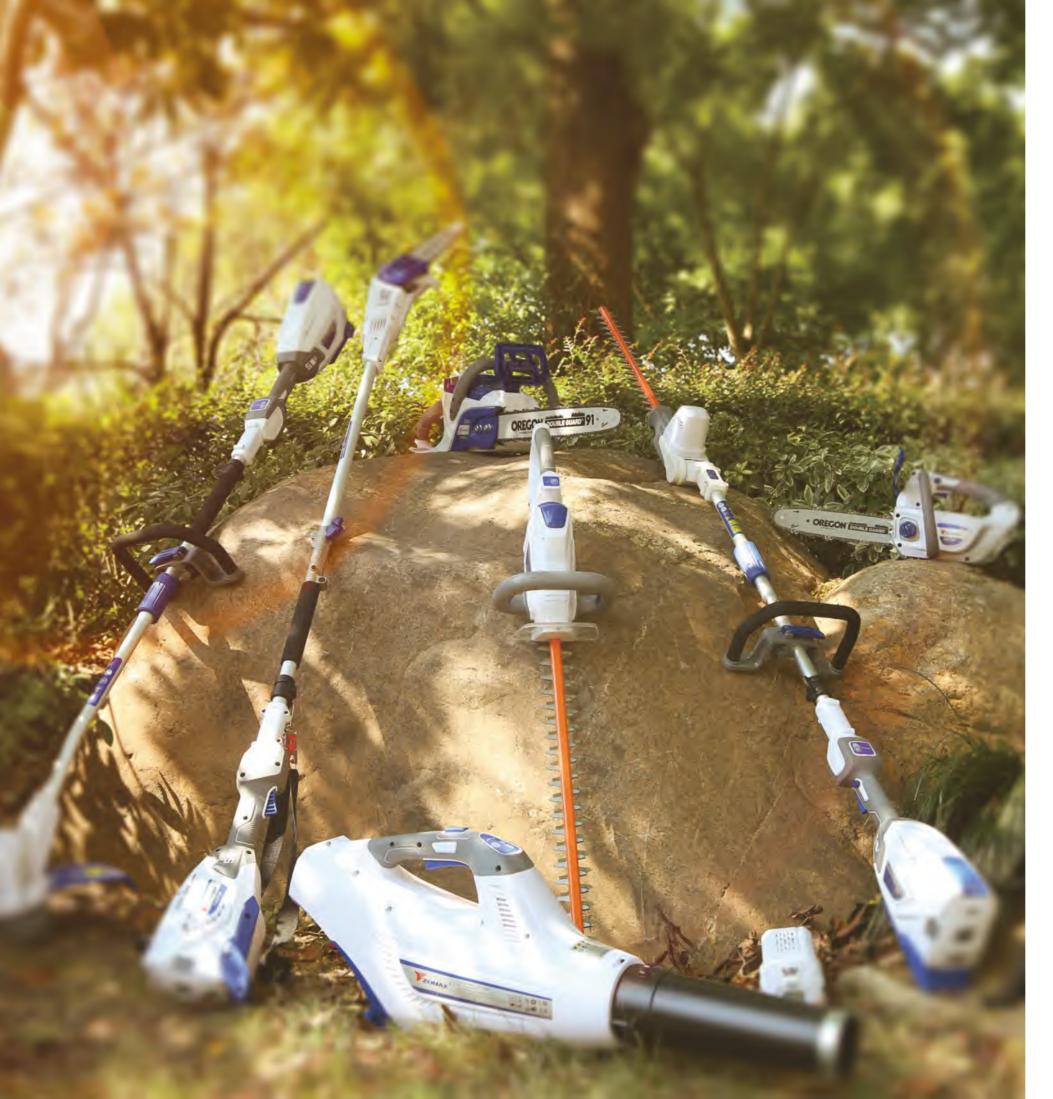

58V Lithium-lon Garden Tools

Zomax 58-volt Max system powers a set of cordless outdoor equipments, including an 18-inch chainsaw, a 10-inch top-handle chainsaw, a multiple-speed blower a 12-inch string trimmer, an 8-inch pole saw, a 20-inch pole trimmer, a 25-inch hedge trimmer, and a coming 21-inch lawn mower.

Whiling focusing on power that can be compared with gas performance, this 58V cordless series is also given priority to light weight, long run time.

Zomax cordless tool series is ideal for family use.

■ Benefits for Lithium-ion Battery Powered Products:

- Quality assurance: Internationally recognized components for longer life time, better quality
- One battery for all tools: save cost and various batteries for customer selection
- Comfort& control: no mixing, no pulling cords, good maneuverability
- $\bullet \;$ User-friendly: low noise, low vibration, light weight but big power
- Operator safety: no emission& zero exposure to toxic fumes
- Cost-saving: no petrol cost; less maintenance






58V Li-Ion Battery Pack () A Columbia

- Good BMS (Battery Management System): battery pack uses internationally well-known IC, microcontroller, fuse.
- Offer protection from overcharging, overheating, overloading, and battery equalization process.
- Use imported Samsung 18650 Lithium-Ion cell with good consistency, continuous large current discharge and long lifespan.
- With low-power mode from sleep which can prevent battery damage if battery has not been charged for a long time.
- Offer equalization repair process for battery over-discharge, to prolong battery lifespan.
- Offer high& low temperature protection for battery to prolong battery lifespan.
- Integrated charging status display.
- Fade-free power with no memory loss after charging.
- Provide 45% longer cycle life than 40V battery pack.
- Offer 40% longer running time than tools with 40V battery pack.




D Test Data

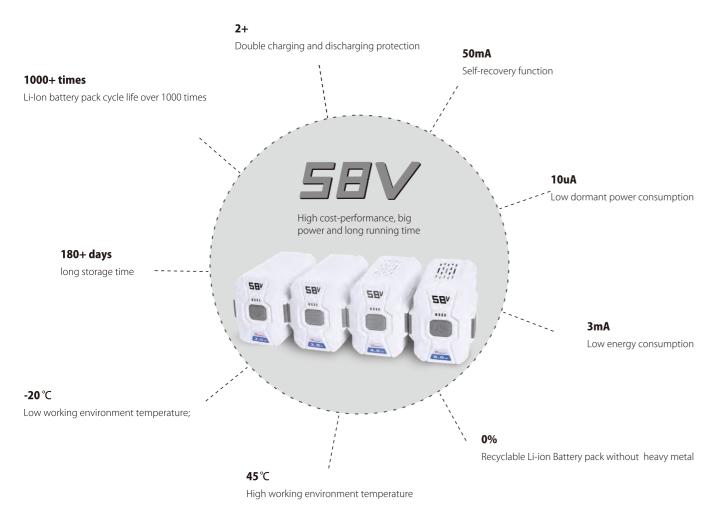

58V 2.0A Lithium-Ion Battery Charger 👊 CE 👄



- Compatible with all Zomax 58V Lithium-Ion tools and batteries
- Integrated charging status display

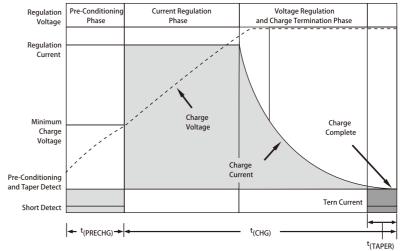

■ Normal charging mode:

Trickle charge detection → constant current charge constant voltage charge → charge terminates

Equilibrium repair charging mode:

Trickle charge detection → constant current charge → constant voltage charge (equilibrium repair) → charge terminates

Specification



Product Name	2A LI-ION BATTERY CHARGER
Model Number	ZMLC5120
Product Specification	58V DC. 2A
Input(CE/GS / AS/NZS)	220V-240V~,50Hz, 1A
Input(cULus)	120V~,50Hz-60Hz, 2.5A
Output	58V DC. 2.0A
Working Environment Temp.	0℃-45℃
Net Weight	0.75 kgs/ 1.65 lbs

Specification for Li-Ion Battery Pack



Product Name	ZMLB5120	ZMLB5140	ZMLB5125	ZMLB5150
Battery cell	Samsung	Samsung	Samsung	Samsung
Battery Nominal Voltage	58 V (Initial no-load voltage peaks at 58 volts, when battery is fully charged)			
Recharge time	1 h	2 h	1.25 h	2.5 h
Working Environment Temp	-20°C- 45°C	-20℃- 45℃	-20°C- 45°C	-20℃- 45℃
Dry weight	1.2 kgs / 2.6 lbs	1.8 kgs / 4.0 lbs	1.2 kgs / 2.6 lbs	1.8 kgs / 4.0 lbs

58V Lithium-lon Garden Tools

ZMLC5150 Fast Charger

(€**≜€** CB

Half time saved in charging the batteries compared with regular charger.

Meet the frequent demand of the battery. 2 types of output voltage:

5V and 58V, not only for batteries, also for electronic devices.





2 types of output voltage: 5V and 58V, not only for battery charging, available for electronic devices too. Enjoy your days during working.



 Product Name
 FAST CHARGER

 Model Number
 ZMLC5150

 Product Specification
 58V DC. 4-8A

 Input
 100V-240V~,50-60Hz

 DC 58V Output
 58V DC. 4.0 - 8.0A

 DC 5V Output
 5V DC. 2.0A MAX. X 2 pcs

 Working Environment Temp.
 0°C- 45°C

 Net Weight
 1.60 kgs/ 3.52 lbs



Charging Time

Product Name	ZMLB5120	ZMLB5140	ZMLB5125	ZMLB5150
Battery Capacity	2.0 Ah	4.0 Ah	2.5 Ah	5.0 Ah
Standard Charging Time	1 h	2 h	1.25 h	2.5 h
Fast Charging Time	29 min.	45 min.	36 min.	55 min.

ZMLA52Battery Waist Pack Storage Compartments

With an additional battery bag, possible to carry 2 batteries one time for long-time and tough work. Providing storage space. No worry for a lack of energy. Batteries on the body, no need to hold, free to remove during operation.

Compatibility

Can be used with 2.0Ah,2.5Ah,4.0Ah and 5.0Ah 58 volt batteries

Ergonomic Design

Padded shoulder straps for comfort and less user fatigue

Sizing

Adjustable comfort belt can adjusts to fit most waist sizes from S to XXXL

Cord

52-inch extension cord for greater maneuverability

Weight

Waist belt reduces work fatigue by relocating the battery weight to your waist

Versatility

 $\label{prop:prop:control} \mbox{Adapter battery fits 58-volt hand-held outdoor power tools to reduce weight and lessen fatigue}$









ZMDC501 58V Brushless Chain Saw

The Zomax cordless chainsaw offers superior power and performance for demanding cutting tasks. The 18" Oregon bar and chain, combined with brushless motor delivers cutting performance equivalent to 45cc gas chainsaw. It runs cleaner, quieter with low vibration, and is free from the hassles of gasoline or cords. Zomax cordless chainsaw is an ideal choice when it comes to cutting firewood, ground maintenance, horticulture and occasional wood sawing work.



Motor type	BLDC
Standard Battery	4.0 Ah
Weight(tool only)	3.8 kgs



Translucent oil tank

Offer a clear view of oil level



Brushless motor

Help deliver power equivalent to 45cc gas engine.




Side chain tensioner

The tensioning screw is convenient to adjust, making chain not easy to get loose.



In-board tool

Make it convenient for chain adjustment.







ZMDC502 58V Brushless Top-handle Chain Saw

The Zomax cordless top-handle chainsaw is a perfect combination of light weight and big power. With unique design to separate battery and chainsaw tool, its weight at hand is only 7.1 lbs (3.2kg), while it can deliver an power beyond belief. The 10" Oregon bar and chain, combined with brushless motor ensures fast and clean cuts. Zomax cordless chainsaw is an ideal choice when it comes to cutting branches and limbs.



Motor type	
Standard Battery	

Weight(tool only)

BLDC

4.0 Ah

3.2 kgs



Quick-connection waist pack

Automatic pop-up design for battery pack, convenient to replace battery pack

Suitable for hedge trimmer as well / only 1.5 kgs



Side chain tensioner

The tensioning screw is convenient to adjust, making chain not easy to get loose.



Metal bumper spike

Ensure better control for easier cuts.



Optional battery backpack

Luxury battery backpack with two battery cabins is for your option.









Product Name	10" CORDLESS TOP-HANDLE CHAINSAW -4Ah (ZMDC502)	10" CORDLESS TOP-HANDLE CHAINSAW -4Ah(ZMDC503)
Motor Type	BLDC(Brushless motor)	BLDC(Brushless motor)
Voltage	58V Max.	58V Max.
Power	1.5 kW Max.	1.5 kW Max.
Cuts per Battery Charge	220(on 4" dia.)	220(on 4" dia.)
Chain Linear Velocity	15.2 m/s	15.2 m/s
Recommended Bar Length	25-30cm/10"-12"	25-30cm/10"-12"
Chain Pitch	3/8", .043" gauge(Oregon 10") 3/8", .050" gauge(Oregon 12")	3/8", .043" gauge(Oregon 10") 3/8", .050" gauge(Oregon 12")
Oil Tank Volume	200 ml	200 ml
Oil Pump	Automatic	Automatic
Equivalent Vibration Level (front/rear handle)	2 / 2.4 m/s ²	2 / 2.4 m/s²
Sound Power Level	101 dB (A)	101 dB (A)
Weight(tool only)	3.2 kgs / 7.1 lbs	3.2 kgs / 7.1 lbs




ZMDG512 58V Cordless Brush Cutter

Optional 6 working heads including brush cutter, trimmer, pole saw, hedge trimmer, lawn edger, cultivator. Freely choose to cutomize your own garden maintenance or agricultural tools. Suitable for home usage.



Motor type	BLDC
Standard Battery	4.0 Ah
Weight(tool only)	4.7 kgs

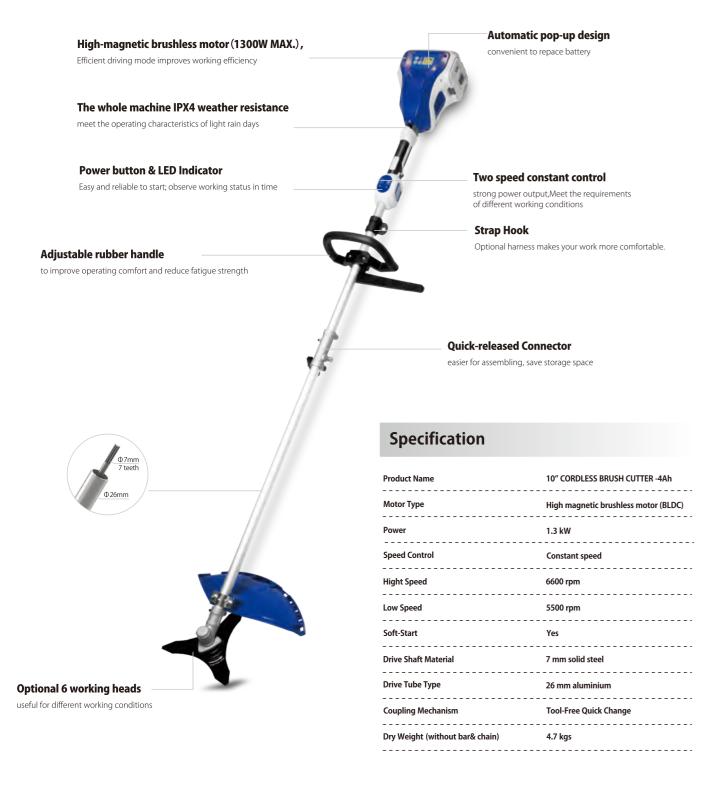

ZMDF512 Engine

Optional 6 working heads



Product Name	Pole Saw	Hedge Trimmer	Brush Cutter	StringTrimmer	Lawn Edger	Cultivator
Weight	1.7 kg	2.7 kg	1.6 kg	1.6 kg	1.9 kg	4.4 kg
Total Length	110 cm	150 cm / 90cm folded	92 cm	85 cm	82 cm	90 cm
Run Time	2.0Ah Up to 63 cuts 2.5Ah Up to 70 cuts 4.0Ah Up to 125 cuts 5.0Ah Up to 140 cuts	2.0Ah Up to 20 mins 2.5Ah Up to 25 mins 4.0Ah Up to 40 mins 5.0Ah Up to 50 mins	2.0Ah Up to 17 mins 2.5Ah Up to 22 mins 4.0Ah Up to 35 mins 5.0Ah Up to 45 mins	2.0Ah Up to 17 mins 2.5Ah Up to 22 mins 4.0Ah Up to 35 mins 5.0Ah Up to 45 mins	2.0Ah Up to 27 mins 2.5Ah Up to 32 mins 4.0Ah Up to 55 mins 5.0Ah Up to 70 mins	2.0Ah Up to 30 mins 2.5Ah Up to 35 mins 4.0Ah Up to 60 mins 5.0Ah Up to 70 mins
RPM (Low / High)	/	/	5500 rpm / 6600 rpm	5500 rpm / 6600 rpm	6000 rpm / 7100 rpm	170 rpm / 205 rpm
Debris Guard Material	/	/	/	/	Aluminium with rubber skirt	Plastic
Blade Material and Type	/	Double-sided laser cut steel blade	Three-sided steel blade	/	/	/
Fixed Cutting angles	/	111 articulating cutting angles	/	/	/	/
Max. Cutting Diameter	250 mm	/	/	/	/	/
Oil Tank Capacity	140 ml	/	/	/	/	/



ZMDG513 58V Cordless Brush Cutter

Bigger power, especially designed for tough works. With Two speed constant control, strong power output, able to meet the requirements of different working conditions. ideal for different working conditions. Much more powerful with U hande structure, perfect choice for professional usage. Split packaging design, easier for storgae.



Motor type	BLDC
Standard Battery	4.0 Ah
Weight(tool only)	4.7 kgs





Product Name	CORDLESS GRASS TRIMMER WITH TRIMMER HEAD	CORDLESS GRASS TRIMMERWITH BRUSH CUTTER HEAD
Motor Type	BLDC	BLDC
Cutting Width	40 cm	25 cm
Power	1.7 kW	1.7 kW
Total Length	187 cm	187 cm
Max. No-Loading Run Time	Up to 35 mins (4 Ah) Up to 45 mins (5 Ah)	Up to 70 mins (4 Ah) Up to 85 mins (5 Ah)
Vibration (M/S²)	2.3/2.5	1.9/2.3
Blade Material	/	Three-sided steel blade
Line Feed	Manual wind bump feed head	/
Dual Line	Yes	/
Rotating Direction	Anti clockwise	/
Line Diameter Supplied	2.4-3.0mm	
Speed Control	Constant speed	
Load Speed	7000 rpm(Hight Speed) / 5500 rpm(Low Sp	eed)
Soft-Start	Yes	
Harnss	Hip pad	
Noise Rating LpA /LwA	83 dB(A) / 96 dB(A)	
Weight (without battery)	4.7 kgs / 10.3 lbs	



ZMDB522 58V Cordless Leaf Blower

The Zomax 58V cordless leaf blower has the power you need to clear your yard and handle with the toughest jobs. It is lightweight, quite but powerful, suitable to use in urban or noise-sensitive areas. Its brushless motor and jet fan design provides power equivalent to many petrol models, as well as reduced vibrations and prolonged motor life. Its turbo button can conveniently offer supreme wind volume. Keep your lawn and yard clear with Zomax cordless blowers.



Motor type	BLDC
Standard Battery	4.0 Ah
Weight(tool only)	1.98 kg



AUTOMATIC POP-UP DESIGN

For Battery Pack, Conventent To Replace Battery Pack



SOFT GRIP

Absorb Vibration and Reduce Fatigue



POWER BUTTON & LED INDICATOR


Easy and Reliable TO Start; Observe Working Status In Time



TURBO BUTTON DELIVERS 610 CFM

For A 22% Boost In Air Volume



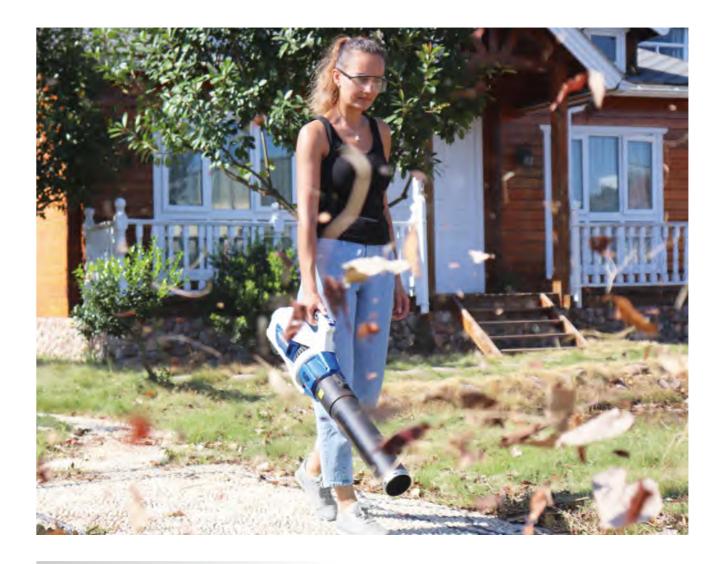





Product Name	CORDLESS LEAF BLOWER - 2.0Ah (ZMDB521)	CORDLESS LEAF BLOWER-4.0Ah (ZMDB522)	
Motor Type	BLDC(Brushless motor)	BLDC(Brushless motor)	
Voltage	58V Max.	58V Max.	
Power	0.78 kW	1.3 kW	
Running Time	60 min.(low speed) / 30 min.(medium speed) 17 min.(high speed) / 12 min. (turbo speed)	120 min.(low speed), 20 min.(high speed) 12 min.(tubo speed)	
MAX. Air Volume	Turbo 480 CFM	Turbo 610 CFM	
Max. Air Speed	1	145MPH / 65m/s	
Equivalent Vibration Level	2.05 m/s²	2.05 m/s ²	
Sound Power Level	101 dB (A)	110 db(A)	
Weight(tool only)	3.7 kgs / 8.2 lbs	1.98 kgs / 4.36 lbs	



ZMDH5316 58V Cordless Hedge Trimmer

The Zomax cordless hedge trimmer ZMDH531 is featured by 58-volt performance and super light weight. With unique design to separate battery and tool, its weight at hand is only 6.6 lbs (3.0kg). Its 25inch laser-cut dual blade contributes to clean cuts through hedges or thick shrubbery. On a single battery charge, it can support 40 minutes run time. ZMDH531 is a wonderful tool for trimming job you can't miss out.



Motor type	PMDC
Standard Battery	2.0 Ah
Weight(tool only)	3.0 kg

Blade sheeth Improve operation safety and make it convenient for storage Super light-weight hedge trimmer at hand only 3.0kg/6.6 lbs Improve cutting efficiency and life time Magnesium alloy gearbox Improve life time and maintainability Soft grip Quick-connection waist pack Absorb vibration and reduce fatigue

5 rotating angle of rear handle -90°, -45°, 0°, 45°, 90° is ideal for horizontal and vertical operation.

suitable for top-handle chainsaw as well / only 1.5 kgs

Power button and LED lightEnsure easy, reliable operation

25" Laser-cut dual blades with 3/4in. (UL)/ 24mm(CE) cutting


cutting swath

thickness for blade teeth, and 52cm

Optional battery backpackLuxury battery backpack with two battery cabins is for your option.











Product Name	CORDLESS HEDGE TRIMMER - 2Ah (ZMDH5315)	CORDLESS HEDGE TRIMMER - 2Ah (ZMDH5316)
Motor Type	PMDC(2-brush)	PMDC(2-brush)
Voltage	58V Max.	58V Max.
Power	0.55 kW	0.55 kW
No-loading Run Time	Max. 55 min.	Max. 55 min.
Stroke Rate 1/min.	3000 rpm	3000 rpm
Blade	Dual, Laser-cut	Dual, Laser-cut
Blade Length	20"/50 cm	24"/61 cm
Equivalent Vibration Level	1.6 / 2.8 m/s²	1.6 / 2.8 m/s²
Sound Power Level	90 db(A)	90 db(A)
Weight(tool only)	4.0 kgs / 7.1 lbs	3.0 kgs / 6.6 lbs



ZMDP551 58V Cordless Pole Saw

The Zomax cordless pole saw is a powerful tool for property maintenance, orchards and tree care operation. Both agile and easy to handle, it is the perfect toolfor those tougher pruning tasks. Its 2.8m length pole can help reach up to 4.0m height. Its vibrations and noise are kept to minimum level, ideal for jobs in urban and noise sensitive areas.



Motor type	PMDC
Standard Battery	2.0 Ah
Weight(tool only)	5.4 kgs





Product Name	CORDLESS POLE SAW - 2Ah
Motor Type	PMDC(2-brush)
Voltage	58V Max.
Power	0.75 kW
No-loading Run Time	Max. 50 min.
Cuts per Battery Charge	80(10cm x 10cm.)
Chain Linear Velocity	5 m/s
Pole Length	9'/2.8 m
Approximate Reach	13'-15'/4m
Recommended Bar Length	20-25 cm/8"-10"
Chain Pitch	3/8", .043" gauge(Oregon)
Oil Tank Volume	80 ml
Equivalent Vibration Level	2.6 / 1.9 m/s²
Sound Power Level	90 db(A)
Weight(tool only)	5.4 kgs / 12.0 lbs
Dry Weight (with 2.0Ah battery)	6.5 kgs / 14.3 lbs



ZMDP552

58V Cordless Pole Hedge Trimmer

The Zomax ZMDP552 pole hedge trimmer delivers 58 volts of trimming power and sufficient run time on a single battery charge. Its 20inch laser-cut dual blade makes your trimming job easy and efficient. Its 1.8m pole length can help extend to 3m height reach for trimming tall and wide hedges. Thanks for its ergonomic design and low vibration, ZMDP552 pole trimmer is a comfortable tool for home-use work.



otor type	PMDC
tandard Battery	2.0 Ah
eight(tool only)	5.5 kgs



Specification

Product Name	CORDLESS POLE HEDGE TRIMMER - 2Ah
Motor Type	PMDC(2-brush)
Voltage	58V Max.
Power	0.45 kW
No-loading Run Time	Max. 55min.
Stroke Rate 1/min.	3000 rpm
Blade	Laser-cut dual blades
Blade Length	20"/52cm
Adjustment Angle	-30°,0°,30°,60°,90°
Pole Length	6′ / 1.8 m
Approximate Reach	8′-10′ / 3 m
Equivalent Vibration Level	3.0 / 3.2 m/s ²
Sound Power Level	96 db(A)
Weight(tool only)	5.5 kgs / 12.1 lbs
Dry Weight (with 2.0Ah battery)	6.7 kgs / 14.8 lbs



73/74



ZMDM541 SERIES 58V 21" Cordless Lawn Mower

The Zomax cordless lawn mower ZMDM541 is powered by two 58-volt lithium-ion batteries and high-efficiency brushless motor to tackle with even most demanding mowing tasks. The brushless motor provides uncompromised power and long-lasting performance with reduced noise. This 21-inch lawn mower can easily start and mow by only pushing buttons with less disturbance and noise. With this powerful lawn mower, you can keep good care of your grassland as well as the environment.



Motor type	BLDC
itandard Battery	4.0 Ah X 2 / 4.0 Ah X 1
Veight(tool only)	About 25 kgs / 22 kgs



Power button & LED indicator

Forget about a pull start. Take control of working status and battery power in time.



Collapsible handle

for easy storage



7-position cutting height

Suitable for different working conditions.



4 IN 1 Cutting system

with grass combing function





Product Name	21" CORDLESS LAWN MOWER - 4Ah X 2PCS (ZMDM541M)	21" CORDLESS LAWN MOWER - 4Ah X 2PCS (ZMDM541T)	21" CORDLESS LAWN MOWER -4Ah X 1PCS (ZMDM541A)	21" CORDLESS LAWN MOWE -4Ah X 1PCS (ZMDM541)
Motor Type	BLDC(Brushless motor)	BLDC(Brushless motor)	BLDC(Brushless motor)	BLDC(Brushless motor)
Voltage	58V Max.	58V Max.	58V Max.	58V Max.
Power	1.7 kW	1.7 kW	1.7 kW	1.7 kW
Cutting Capacity	21"	21″	21″	21″
Cutting Deck Type	Steel deck	Steel deck	Steel deck	Steel deck
No-loading Run Time (with Self-propelled)	Up to 90 min.	Up to 100 min.	Up to 45 min.	Up to 50 min.
Self-propelled Type	Motor control	1	Motor control	1
Self-propelled Speed	0.8-1.4m/s (4 settings)	I	0.8-1.4m/s (4 settings)	/
Cutting Speed Control	Automatic variable speed	Automatic variable speed	Automatic variable speed	Automatic variable speed
No-loading Speed	2900rpm	2900rpm	2900rpm	2900rpm
Cutting Deck Style	Steel	Steel	Steel	Steel
Grass Catcher	60 L	60 L	60 L	60 L
Cut-height Setting	28 mm-90 mm (1"-3.5")	28 mm-90 mm (1"-3.5")	28 mm-90 mm (1"-3.5")	28 mm-90 mm (1"-3.5")
Collapsible Handle		Handle folded down easily for v	ertical storage	
Handle Control Led Indicator	Battery power level indicator, Self-propelled speed indicator, Product Control Indicator	Battery power level indicator, Self-propelled speed indicator, Product Control Indicator	Battery power level indicator, Self-propelled speed indicator, Product Control Indicator	Battery power level indicator Self-propelled speed indicator Product Control Indicator
Handle Heights	Two - user adjustable	Two - user adjustable	Two - user adjustable	Two - user adjustable
Wheel Diameter (Front / Rear)	8" / 10"	8" / 10"	8" / 10"	8" / 10"
Water Resistance Rating	IPX4	IPX4	IPX4	IPX4
Equivalent Vibration	1.95 m/s²	1.95 m/s²	1.95 m/s²	1.95 m/s²
Sound Power Level	92 dB(A)	92 dB(A)	92 dB(A)	92 dB(A)
Weight(tool only)	About 25 kgs / 55 LBS	About 22 kgs / 48.5 LBS	About 25 kgs / 55 LBS	About 22 kgs / 48.5 LBS




ZMDC20120V Cordless Chainsaw

ZOMAX newly developed 20V cordless tools, Compact and exquisite design, while meeting with the ergonomic features. 0.98kg light weight, Toolless adjustment, Rubber grip handle for a good operation feeling. 20V peak power configuration, 9m/s high speed chain, 600W running power, 7000rpm max. speed to guarantee smoothly working, let you enjoy the extraordinary.

ϵ

Motor type	BLDC
Standard Battery	4.0 Ah
Weight(tool only)	0.98 kg

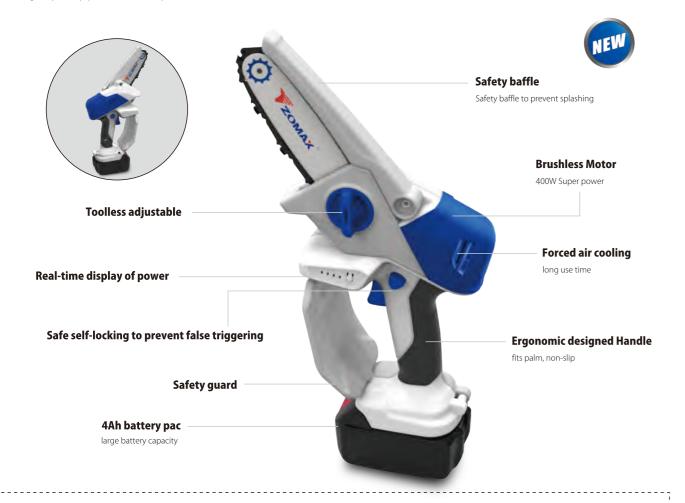

Specification

Certificate	CE
Product Name	20V CORDLESS CHAINSAW -4AH
Motor Type	BLDC(Brushless Motor)
Voltage	20V Max
Power	400W
No-loading Run Time	60mins
Log Cutting Pieces	55pcs (Φ10 cm) 180pcs (Φ3 cm)
Chain Linear Velocity	7m/s
Max. Speed	7000rpm
Weight (without battery)	0.98 kg



Accessories

ZOMAX, apart from supplied with comprehensive and powerful garden machinery, serves reliable performance, effective cutting and convenient operation, various high level accessories are available. As the saying goes, opportunity is to those who are prepared. Safeguard is necessary. Safety helmets, protective glasses, soundproof earmuffs, comfortable clothes, high-quality labor safety shoes are essential to protect users from top to toe. ZOMAX accessories help users win at the starting point.





Pulp Molded Packaging

The new package of chainsaw, greatly enhance the protection for chain saw in transportation. Suitable for home/semi-professional chainsaw whose bar length should be less than 22"/55cm.



Oregon Chain and Guide Bar

Highly recommend: ZOMAX chain saw with Oregon chain and guide bar. Win-win-cooperation. Perfect combination shows amazing performance for various tasks, ranging from harvesting wood to cutting firewood.



Plug-in Handle Box

The guide bar and saw chain installed on the head of chainsaw directly in manufactory. Saving cost during loading, economic and convenient.



Carry Bag

The carry bag is very convenient during the storage or transport of chainsaw whose bar length should be less than 18"/45cm.



Spare Parts Packaging

We highly recommend using ZOMAX original spare parts in replacement and maintenance in after-sale service, ensure powerful performance and long life. Nice packing and good image.



Blow Case

Chainsaw blow case is good for storage or transportation of home/semi-professional chainsaw whose bar length should be less than 18"/45cm.





Body Protector

- Full protect coat, pant or jumpsuit, cotton T-shirt for a comfy fit
- For optimal protection during cutting or carving

